


# ENVIROGRAF® PRODUCT 28

## TRUNKING WRAPS

All Electrical Products to comply with the revised 17th Edition of the IEE Regulations and Document B of UK Building Regulations

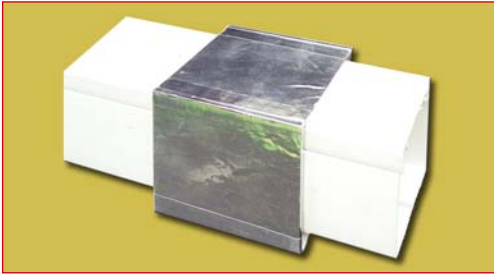

### DESCRIPTION

An intumescent trunking wrap, to fit around PVC trunking of all sizes.

### USE

Use wherever PVC electrical trunking passes through a block, brick, or concrete fire barrier wall or floor. The wrap is fitted around the trunking, and pushed into the wall or ceiling, so that in a fire the wrap expands and crushes the trunking. Can be used where PVC electrical trunking passes through plasterboard partitions or walls. See also Envirograf® Product 110.

### PERFORMANCE

This product underwent a fire resistance test employing the general procedures and criteria of BS476 Part 22 (1987), achieving an integrity of 130 minutes in solid walls, and 67 minutes in hollow walls. Also tested at VNE to European Standard EN1363-1 (2000).

### ORDERING REFERENCES :

PATENTED

**TW** State the size of trunking and the thickness of the wall