


ENVIROGRAF® PRODUCT 102

INTUMESCENT MATERIAL TO FIT UNDER DOOR EDGING

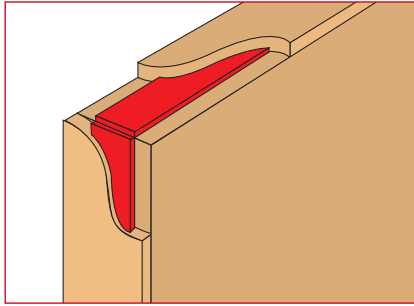

DESCRIPTION

Envirograf® self-adhesive 2mm thick intumescent material to fit under hardwood door edging as a fire protection seal (ES/UL). The material is protected from damage by the hardwood door edging and expands in a fire to seal the gaps between door and frame in a fire. Also supplied with hardwood door edging (ES/DE/UL) to suit door edges 42-44mm and 52-54mm.

USE

The strip is fitted to the underside of the hardwood lip on the edges of the door.

PERFORMANCE

This product was included in a fire test conducted to the general procedures and criteria of BS476 Part 22 (1987), achieving an integrity of up to 60 minutes.

ORDERING REFERENCES :

PATENTED

ES/UL/25	To suit doors 25 mm thick	30 minutes protection
ES/UL/30	To suit doors 44 mm thick	30 or 60 minutes protection
ES/UL/34	To suit doors 50 mm thick	60 minutes protection
ES/DE/UL/30	To suit doors 42-44 mm thick	30 or 60 minutes protection
ES/DE/UL/34	To suit doors 52-54 mm thick	60 minutes protection