
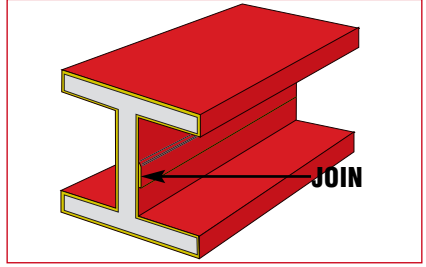
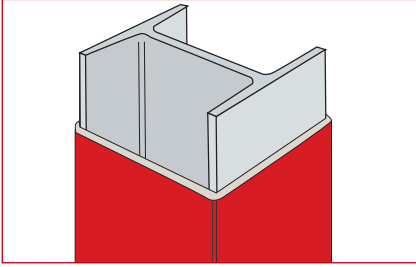
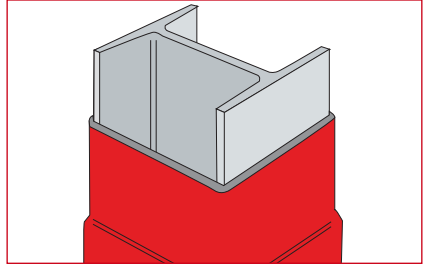


# ENVIROGRAF® PRODUCT 111

## COATED CERAMIC QUILT FOR STEEL

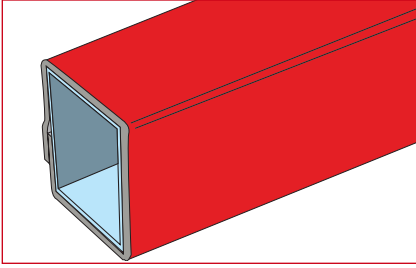

### DESCRIPTION

A durable intumescent quilt, designed for fire protection around angled steel, RSJs, steel tubes, trunking, ventilation ducting, and other steel items. Must be overlapped by 50mm and secured by adhesive. **CQT** is 6mm thick and 1220mm wide, and **CQB** is 6mm thick and available in 50mm, 75mm, 100mm, and 150mm widths.

### USE

Wrap around the items using Envirograf® Product 46 (intumescent adhesive) for adhesion, and secure with galvanised wire over the 50mm overlapped ends to finish. The sheet material (CQS) must be overlapped 50mm at walls or joints.

### PERFORMANCE

Tested on steel in accordance with the general principles and criteria of BS476 Part 20 (1987), achieving 87 minutes of integrity.

### ORDERING REFERENCES :

PATENTED

|                  |                                     |
|------------------|-------------------------------------|
| <b>CQT/6</b>     | <b>6mm thick x 1220mm x 8m roll</b> |
| <b>CQB/6/ 50</b> | <b>6mm thick x 50mm x 8m roll</b>   |
| <b>CQB/6/ 75</b> | <b>6mm thick x 75mm x 8m roll</b>   |
| <b>CQB/6/100</b> | <b>6mm thick x 100mm x 8m roll</b>  |
| <b>CQB/6/150</b> | <b>6mm thick x 150mm x 8m roll</b>  |