
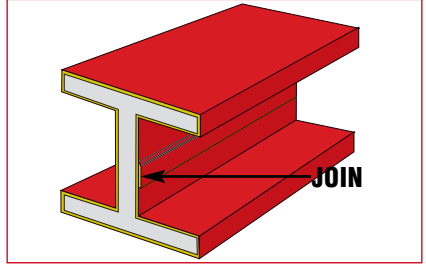
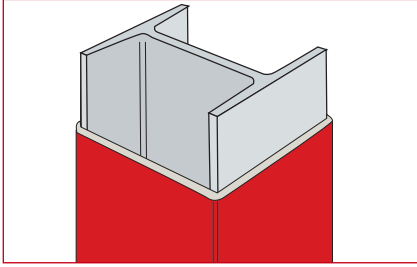
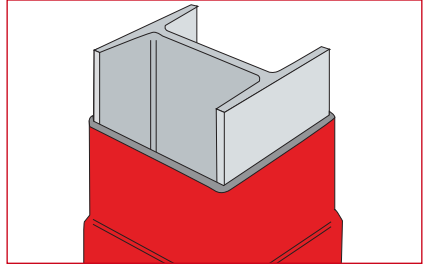


ENVIROGRAF® PRODUCT 111

COATED CERAMIC QUILT FOR STEEL

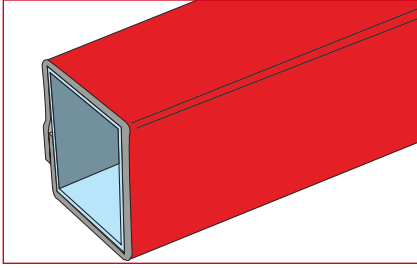

DESCRIPTION

A durable intumescent quilt, designed for fire protection around angled steel, RSJs, steel tubes, trunking, ventilation ducting, and other steel items. Must be overlapped by 50mm and secured by adhesive. **CQT** is 6mm thick and 1220mm wide, and **CQB** is 6mm thick and available in 50mm, 75mm, 100mm, and 150mm widths.

USE

Wrap around the items using Envirograf® Product 46 (intumescent adhesive) for adhesion, and secure with galvanised wire over the 50mm overlapped ends to finish. The sheet material (CQS) must be overlapped 50mm at walls or joints.

PERFORMANCE

Tested on steel in accordance with the general principles and criteria of BS476 Part 20 (1987), achieving 87 minutes of integrity.

ORDERING REFERENCES :

PATENTED

CQT/6	6mm thick x 1220mm x 8m roll
CQB/6/ 50	6mm thick x 50mm x 8m roll
CQB/6/ 75	6mm thick x 75mm x 8m roll
CQB/6/100	6mm thick x 100mm x 8m roll
CQB/6/150	6mm thick x 150mm x 8m roll