


ENVIROGRAF® PRODUCT 125

FIRE BARRIER CURTAIN FOR ROOF VOIDS

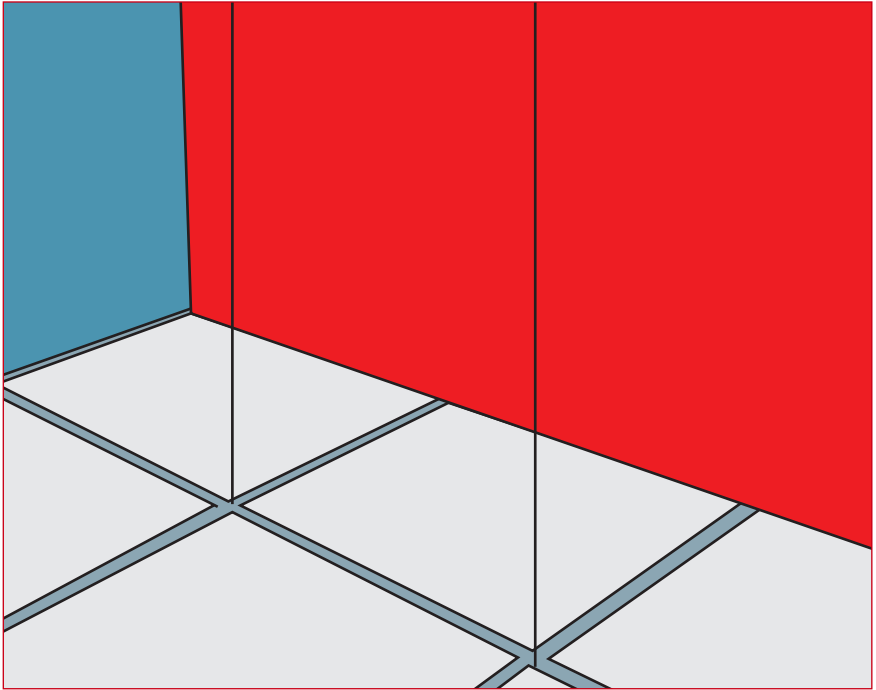

DESCRIPTION

A fire barrier curtain for use where insulation is not an important criterion. Available in 1200mm widths.

USE

For loft and suspended ceiling separation. All joints must overlap by 50mm and be adhered using Envirograf® Product 57 fireproof adhesive. Service penetration can be passed through. See data sheet for fixing applications.

PERFORMANCE

This product has been subjected to a fire test in accordance with BS476 Part 22 (1987) achieving an integrity of 39 minutes and insulation of 3 minutes. Although the insulation failed at 3 minutes, the radiant heat did not reach through to ignite anything on the other side.

ORDERING REFERENCES :

VB3012 Barrier curtain for roof voids 1200mm wide

PATENTED



INSTALLATION AT KING'S CROSS UNDERGROUND STATION, LONDON, ENGLAND