
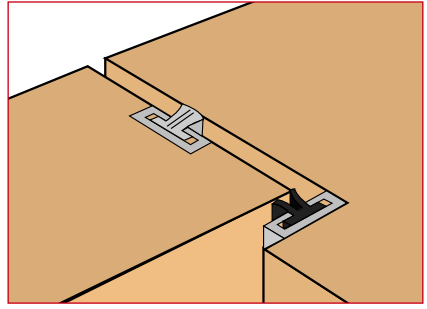


# ENVIROGRAF® PRODUCT 73

## REBATED ACOUSTIC, DRAUGHT, SMOKE, AND WEATHER SEALS

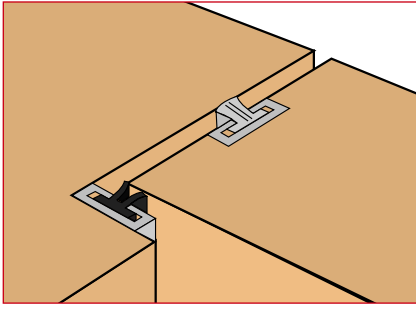

### DESCRIPTION

A 3mm deep x 10mm wide x 2100mm long aluminium or plastic holder (black, brown, cream, grey, red, or white plastic) containing a brush seal in various sizes and colours or a black rubber seal in various sizes and patterns. The holder has a self-adhesive backing for ease of fitting.

### USE

The seal holder is rebated into wooden doors or windows and adhered to the surface of metal windows using the self-adhesive backing on the base of the holder. It can be fitted to single or double doors, folding doors, sash windows, etc. See data sheet for details.

### ORDERING REFERENCES :









- ES/AH** Aluminium rebated holder (self-colour)
- ES/PH** Plastic rebated holder (black, brown, cream, grey, red, or white)
- /A** Add suffix /A and size for angled rubber seal
- /B** Add suffix /B and size and colour for brush seal
- /S** Add suffix /S and size for straight rubber seal
- /T** Add suffix /T and size for tubular rubber seal
- /V** Add suffix /V and size for V-shaped rubber seal





If plastic, state holder colour. If using brush seal, state its colour

### Ordering example:

**Envirograf® Seals Plastic Holder (black) with Brush seal 5mm (grey) – ES/PH(black)/B5(grey)**

						
	Holder	Seal A	Seal B	Seal S	Seal T	Seal V
Seal Size		6/9mm	3/5/7/10mm	5/7/9mm	6/9mm	6mm
Use For:		Single-action Doors and Casement Windows	Doors and Windows	Single/Double Doors with Double Threshold	Acoustic Cushioning	Single-action Doors closing on Door Stop

**Important: 1-1½mm of the brush or rubber seal is held within the holder. Brush with fin is always ½mm higher than regular brush. Make allowance for this when specifying.**



Also used for sliding doors and sliding windows

Fitting Requirements for Product 73

Single      Double

Shows position of door seals fitted to door or frame