


# ENVIROGRAF® PRODUCT 78

## ENVIROSTRIP

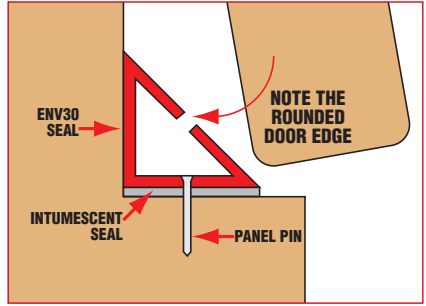

### DESCRIPTION

An L-shaped plastic (black, brown, cream, or white) strip 12mm x 12mm x 2200mm with rubber fin seals, offering an effective acoustic, draught, smoke, and weather seal that will accommodate the movement of the door. Quick and easy to apply. A fire seal version is available, giving up to 30 minutes integrity in a fire.

### USE

Fitted into the rebate of a door or window frame. Self-adhesive backing for ease of fixing, with maximum adhesion achieved after 72 hours in situ. For extra security, additional panel pin fixing may be employed if desired. This low-cost seal is ideal for public housing projects by councils and housing associations, to be fitted on all internal and external doors in apartments and houses, in positions where it will not be damaged.

### PERFORMANCE

ENVIROSTRIP/F, with intumescent material fitted, was tested to BS476 Part 22 (1987) and achieved an integrity of 30 minutes. It also has acoustic properties for airborne sound.

### ORDERING REFERENCES :

**ENVIROSTRIP (state colour required)**  
**ENVIROSTRIP/F (fire-rated version)**

