
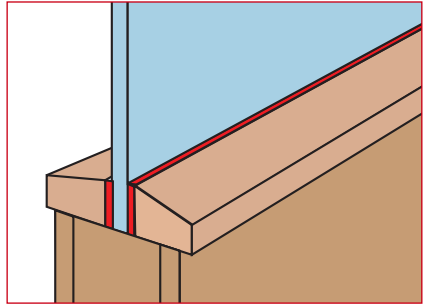


# ENVIROGRAF® PRODUCT 79

## GLAZING BEAD SYSTEM FOR FIRE DOORS AND SCREENS

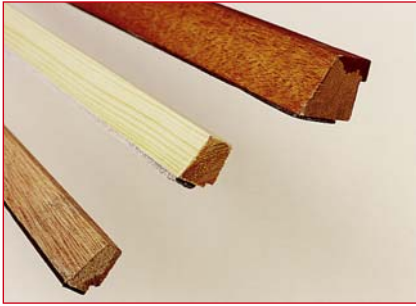

### DESCRIPTION

A complete glazing system consisting of 2100mm long wooden beads (with bolection moulding if required) treated with Envirograf® clear intumescent coating. Circular glazing beads are also available. Standard finishes include sapele and pine (others available to order)

### USE

Ideal for doors and screens. The beads can be painted or varnished, and they are supplied with appropriately-sized fixing pins or screws for fixing at 200mm intervals along the length.

### PERFORMANCE

This product was used in a number of fire resistance tests employing the general procedures and criteria of BS476 Part 22 (1987), achieving an integrity of over 45 minutes (10mm thick hardwood and 15mm thick softwood) and over 68 minutes (25mm hardwood).

### ORDERING REFERENCES :

PATENTED

<b>Straight</b>	<b>Bead Size</b>	<b>To Suit</b>	<b>Wood Type</b>	<b>Protection</b>
<b>30/G10</b>	<b>10mm</b>	<b>44mm doors</b>	<b>hard</b>	<b>30 minutes</b>
<b>30/G15</b>	<b>15mm</b>	<b>44mm doors</b>	<b>soft</b>	<b>30 minutes</b>
<b>60/G25/44</b>	<b>25mm</b>	<b>44mm doors</b>	<b>hard</b>	<b>60 minutes</b>
<b>60/G25/54</b>	<b>25mm</b>	<b>54mm doors</b>	<b>hard</b>	<b>60 minutes</b>
<b>Circular</b>				
<b>C4/30/G10</b>	<b>10mm</b>	<b>400mm diam</b>	<b>hard</b>	<b>30 minutes</b>
<b>C5/30/G10</b>	<b>10mm</b>	<b>500mm diam</b>	<b>hard</b>	<b>30 minutes</b>
<b>C4/60/G25</b>	<b>25mm</b>	<b>400mm diam</b>	<b>hard</b>	<b>60 minutes</b>
<b>C5/60/G25</b>	<b>25mm</b>	<b>500mm diam</b>	<b>hard</b>	<b>60 minutes</b>

Add suffix /L if bolection moulding (lip) is required