


ENVIROGRAF® PRODUCT 86

FIREPROOF COATINGS FOR SLABS

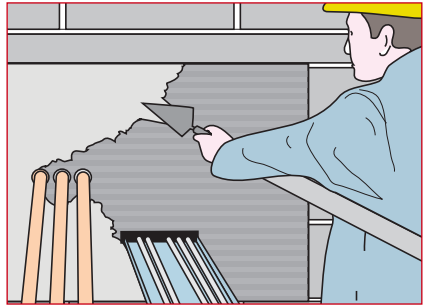

DESCRIPTION

A white intumescent coating for application to RW6 rock fibre slabs and non-fibrous slabs (as applied to Envirograf® Products 4 and 5). Supplied in 1 litre, 2½ litres, and 5 litres (other quantities available).

USE

Apply the Envirograf® coating by brush or trowel to either high density RW6 rock fibre slabs or Envirograf® Product 41 (high density fireproof sponge) to provide extra fire protection.

PERFORMANCE

Tested to BS476 Part 22 (1987), achieving an integrity of 4 hours. Also tested to European Standard EN1363-1 (2000).

ORDERING REFERENCES :

CS/W Intumescent Coating (White)

