


# ENVIROGRAF® PRODUCT 98

## DOOR STOP FOR ACOUSTIC, DRAUGHT, AND SMOKE PROTECTION

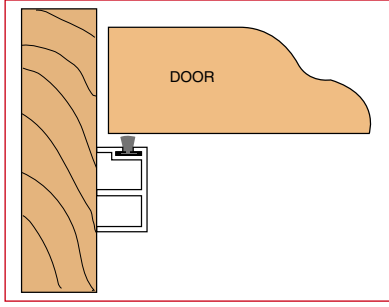

### DESCRIPTION

A brown or white plastic door stop including a smoke seal to replace existing wooden door stops. Can be fitted with acoustic seals which also serve as draught and smoke seals.

### USE

Used as a surface-mounted door stop. The standard smoke seal supplied is a 5mm brush. Rubber seals may also be used, as indicated below (all of these seals offer acoustic, draught and smoke protection). The smoke seal helps to ensure a fire escape route free from smoke.






### ORDERING REFERENCES :

PATENTED

**SDSTOP** Single Door set comprising 2 x 2100mm and 1 x 1050mm pieces

**DDSTOP** Double Door set comprising 3 x 2100mm and 1 ES/25/HS pieces

State door stop colour and smoke seal required (see below)

					
Type:	Seal A	Seal B	Seal S	Seal T	Seal V
Seal Size:	6/9mm	3/5/7/10mm	5/7/9mm	6/9mm	6mm
Use For:	Single-action Doors	All Doors	Double-Action Doors	Cushioning	Single-action Doors

**Important: 1-1½mm of the brush or rubber seal is held within the holder. Brush with fin is always ½mm higher than regular brush. Make allowance for this when specifying.**