

# AAF/S

## ACOUSTIC EXTRACT VENTILATOR

FEATURES	INSTALLATION	PHYSICAL SPECIFICATION
----------	--------------	------------------------

Provides acoustic attenuation to 43 dBA

Integral anti backdraught shutters

Dual speed operation


Through wall installation

Supplied with external grille and wall trim for semi-recessed wall installation

**Wiring:** Must comply with IEE Regulations.

**Cable:** 1mm<sup>2</sup> max.

**Fuse:** 3 amp (when fan is supplied from 5A lighting circuit no local fuse is required).

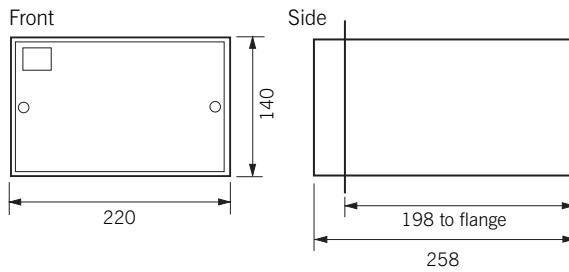


**Weight:** 8kg.

**Material:** Casing – pre-galvanised fabricated steel, stoved enamel finish. White fascia panel.

Extruded aluminium wall trim, plastic terracotta – coloured external grille.

### PERFORMANCE

	Performance to BS 848 Pt1 in free air (l/s)		Normalised sound pressure level in room when fan is on (dB(A))		Attenuation: difference in sound pressure when fan is off (Frequency average 00-3150 Hz) dB(A)
	High	Low	High	Low	
AAF	42	75	49	33	43

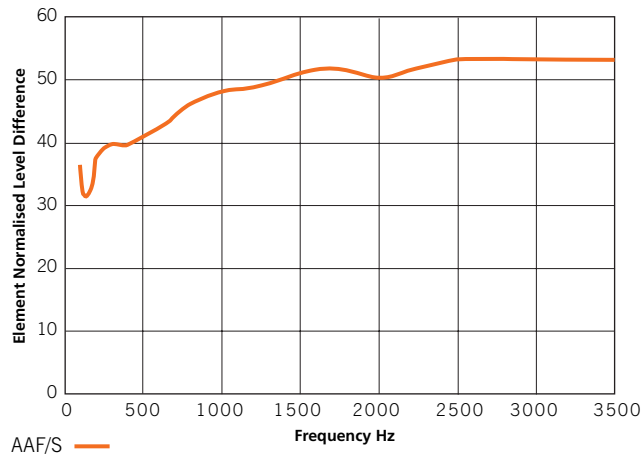

**Electrical Specification:**  
220/240V ~ 50Hz Class I

**Consumption:**  
92W

